

WH-8

CNC 2POINT COILING MACHINE

Very cost effective & user-friendly CNC 2-point coiling machine
originally-intended to replace mechanical coiling machines


MNO (Mec New Operation) control system gives advanced operability, gaging and
production control with multi-function.



TOSAG Engineering AG
Fuchsweidweg 12, CH-4852 Rothrist
Tel. +41(0)62 794 38 28, Fax +41(0)62 794 14 58
www.tosag.ch philipp.schaerer@tosag.ch

Features

- 5-Axis for Feed, Cut, Wedge Pitch, Push Pitch, & Point equipped as standard spec.
- Simple mechanisms for user-friendliness, and Rib cam as driving cam for high speed production
- Not space-consuming for the control system equipped on the mechanism trestle – same space as mechanical coiling machine
- For general spring parts like cylindrical springs and conical springs, dimensional data input on to the pattern program will be converted to produce desired parts accordingly. For variation of conical springs, straight, bowl and such shape can be formed adjusting in multi-step up to 100-step, and desired load can be achieved.
- Program display controlled by "MNO" is easy-to-read, i.e. program flow, each axis operation status, input/output, jump and so on can be grasped by scrolling.
- Contact type sensor and Non-contact type capacitance sensor are available. With Auto-collection and Multi-functional production management system gives easy-to-control production.
- Left wind unit, Initial tension servo, 1-point unit and Slip sensor are available as option.

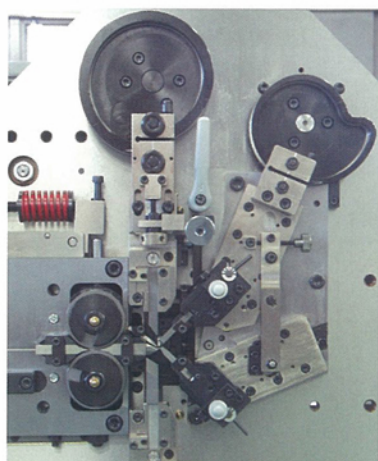



2-point area
Simplification & User-friendly



Pitch line chart on program screen

Setting Pitch program and Outside dia. Program respectively makes adjustment of compression spring program easier.

Specifications

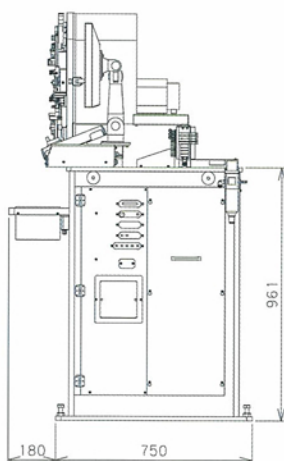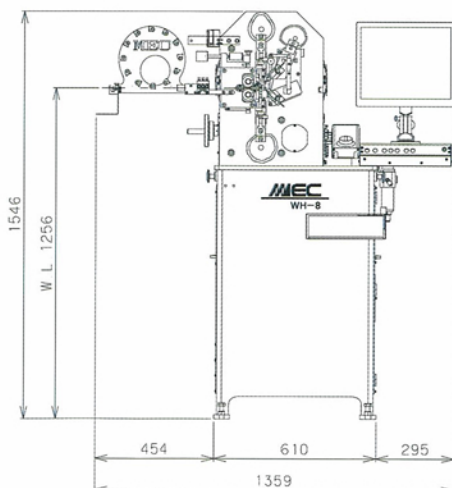

Standard Spec

Wire Dia. 0.1~0.8mm
Outside Dia. 28mm or more
D/d Index 4 or more

Feed Axis

Resolution 0.001mm
Max.Speed 118 m/min

Cut Axis

Resolution 0.001°

Wedge/Pitch Axis

Resolution 0.001mm

Push/Pitch Axis

Resolution 0.001mm

Point Axis

Resolution 0.001mm

Solenoid Valves

4 pcs (8 pcs at Max)

Service Air Pressure

Max 0.5 MPa

Power Source

3-phase AC 200V, 16A

Net Weight

400kg

Control Device

OS Windows XP
Max.9-Axis controllable

Display

17" TFT color LCD

External memory

USB Thumb drive

Service Temperature

0~40 deg. C

Specifications are subject to change without notice.