


# DIGITAL TORQUE TESTERS

ATTENTION: NOT SUITABLE FOR ELECTRIC WRENCHES, IMPACT WRENCHES OR PNEUMATIC WRENCHES




- With external sensor, to test torque wrenches, torque screwdrivers and other torque tools
- Clockwise and counter-clockwise operation
- Peak, track and first peak working modes
- Unit: N.m, in.lb, ft.lb, kg.cm
- Low and high limits with judgement
- Target torque value can be set, with audible and visible alarm:
  - Green LED light on and buzzer sounds when the value is 80%~100% of target torque
  - Both green and red LED light on and buzzer sounds when the target torque value is reached
- Automatic power off

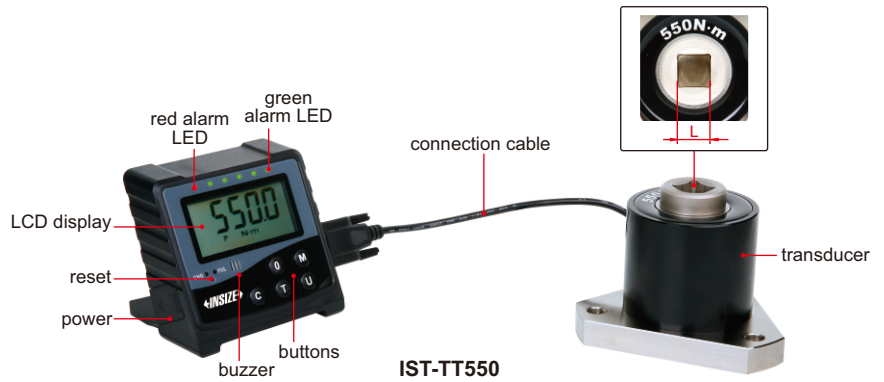

## SPECIFICATION

Code	IST-TT5	IST-TT50	IST-TT220	IST-TT550	IST-TT2200
Range	0.5~5N.m	5~50N.m	22~220N.m	55~550N.m	220~2200N.m
Accuracy	±1% (clockwise and counter-clockwise)				
Resolution	0.001N.m	0.01N.m	0.1N.m	0.1N.m	1N.m
Square socket (L)	1/4"	3/8"	1/2"	3/4"	1"
Power supply	DC				
Adaptor	no	3/8" to 1/4"	1/2" to 3/8" 3/8" to 1/4"	3/4" to 1/2" 1/2" to 3/8"	1" to 3/4" 3/4" to 1/2"
Transducer dimension	60×60×47 mm	89×89×65 mm	109×109×73 mm	140×140×97 mm	160×160×116 mm
Weight	0.7kg	1.1kg	1.4kg	2.8kg	4.7kg



## STANDARD DELIVERY

Main unit	1pc
Transducer with 1m cable	1pc
AC/DC adapter	1pc
Adaptor	refer to the left